



---

## **INSTALLATION INSTRUCTIONS**

GRILL/ BRUSH GUARD 5047  
2004 DODGE DURANGO 2/4WD

### **PARTS LIST**


- |                                      |                         |
|--------------------------------------|-------------------------|
| (1) FRONT BAR                        | (12) 7/16" FLAT WASHERS |
| (2) FRAME MOUNT BRACKETS             | (6) 7/16" HEX LOCK NUTS |
| (2) BRACE BRACKETS, (2) TOP BRACKETS | (2) 3/8 BUTTON BOLTS    |
| (6) 7/16" x 1 1/4" HEX BOLTS         | (4) 3/8 NYLON LOCK NUTS |
| (2) 3/8 FLAT WASHERS                 | (2) 3/8 X 1 ¼ HEX BOLT  |
| (2) 3/8 SAE WASHERS                  |                         |

### **PROCEDURE**

1. Start with passenger side frame bracket. Remove the 2 lower nuts holding the bumper frame to the main frame and then attach frame brackets using the existing flange nuts.
2. Repeat for driver-side Frame Mount Bracket.
3. Attach top support L bracket to the existing flange nuts as shown
4. Repeat the above for the driver side
5. Attach top support bracket to the L bracket between bumper and grill using the 3/8 hex nut and SAE washers.
6. Repeat above for driver side.
7. Line up the 3 holes on the lower portion of the Front Bar with the 3 holes of the Frame Mount Brackets and attach using (3) 7/16" x 1 1/4" hex bolts, (6) 7/16" flat washers, and (3) 7/16" hex lock nuts for each side. Hand tighten.
8. Proceed to attach top support brackets to the outer edge of front bumper up rights using the 3/8 x 1 button bolts.
9. Align front bar assembly with front of the vehicle and secure all fasteners.

**SEE ILLUSTRATION BELOW**

passenger side shown

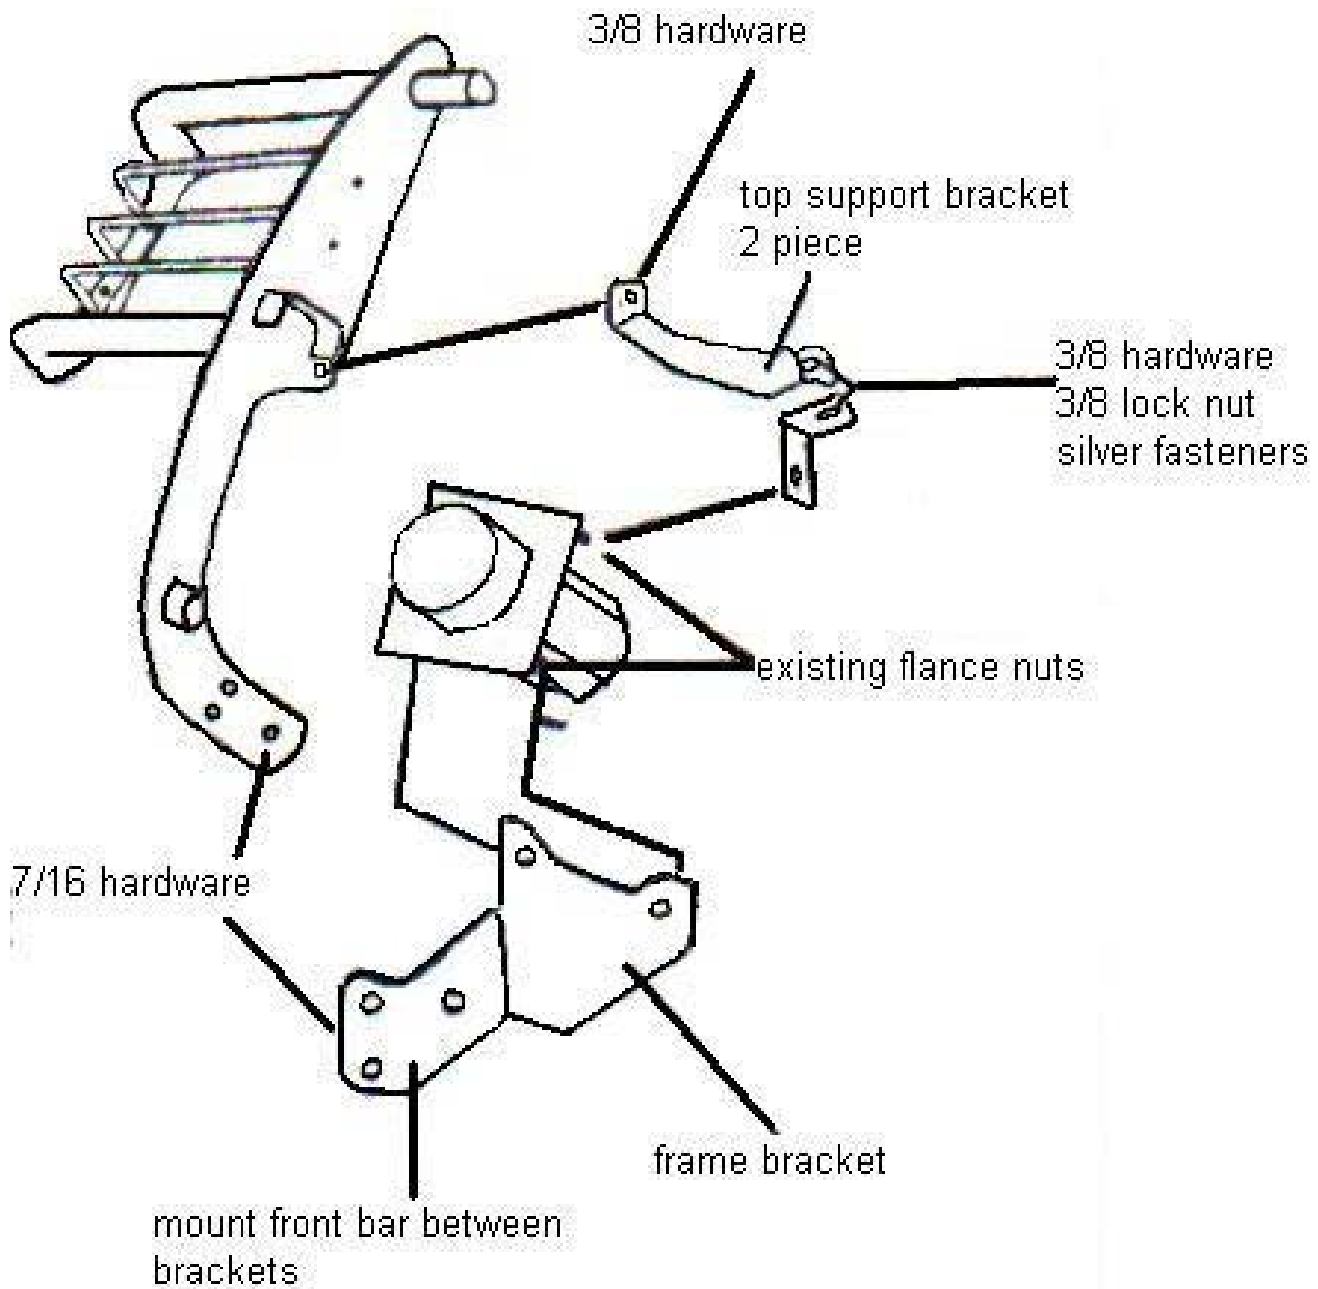

**customer service call 888-800-2743**